

Project

Part Number

Ref.

Data Sheet : Catalog Page 96



**Overview**

Enclosure (CP) is a UL Listed enclosure suitable for various control components. CP incorporates the same steel construction and powder coat finish standard on Relay Panel (RP) enclosures. CP also includes a monolithic back plate which is finished in white for increased interior visibility and removable for component as well as enclosure mounting.

Enclosure 26 (CP26) features a hinged reversible door, locking latch, and transparent document pocket. CP26 is available for surface and recess mounting applications.

**Features**

- 345 sq inches of component mounting surface
- Powder coated steel construction
- Lockable and reversible door
- Surface and recess mounting options

**General Specifications**

- Construction: 16ga steel
- Finish:
  - Enclosure: Black powder coat
  - Back Plate: White powder coat

**Dimensions:**

- Enclosure : 25.00"(635mm)H x 18.00"(457mm)W x 5.75"(146mm)D
- Back Plate (Mounting Surface): 22.97" (583mm)H x 15.00"(381mm)W
- Interior Depth: 5.00"(127mm)D
- Door Surface Mount : 25.25"(641mm)H x 18.08"(459mm)W
- Door Recessed (Flush) : 26.50"(673mm)H x 19.58"(497mm)W
- Recessed door incorporates 0.75"(20mm) flange around the enclosure's

- perimeter
- Weight: 28lbs(13kg)
- Mounting: Surface or recess mounted
- Operating Environment: Type 1 (dry / indoor environment)

**Certifications**

- UL Listed, UL508A, US/Canada

**Warranty**


- Five (5) year limited manufacturer warranty from date of shipment (extended warranty optional)

# Enclosure 26


www.BRTint.com : 800-241-9173 Blue Ridge Technologies® © 2016 Blue Ridge Technologies International, LLC All Rights Reserved. CP26-DS-V14.05

Data Sheet : Catalog Page 97


## Enclosure / Backplate Dimensions

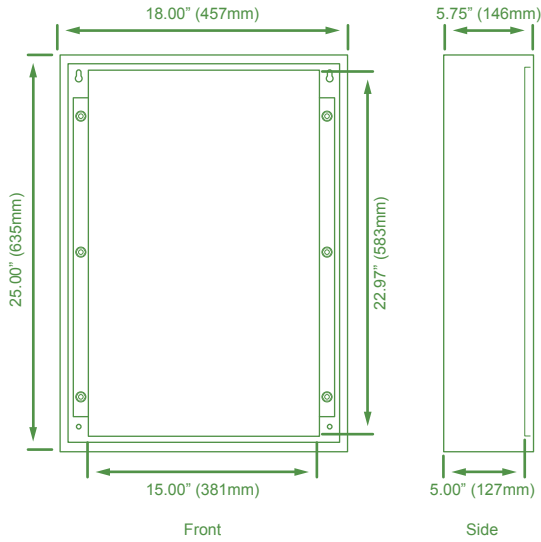

## Surface Mount Door Dimensions

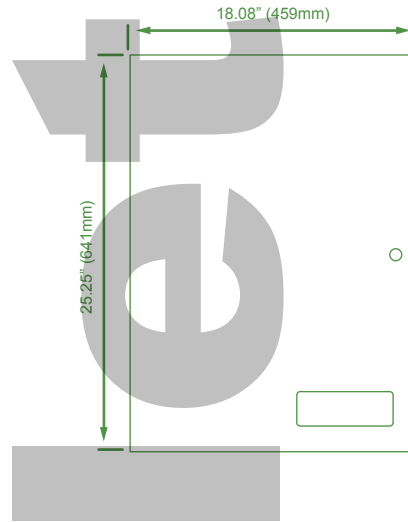

## Recessed Mount Door Dimensions

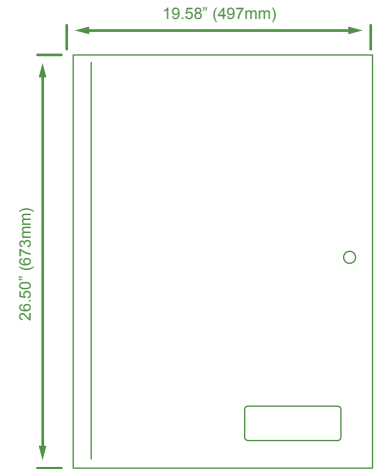

## Ordering Information

Part Number	Description
CP26-S	Enclosure 26" Surface Mount