

Overview

Retrofit Kit (RK) replaces existing relay panel electronics. RK installation retains the original relays, line voltage wire, conduit, and enclosure reducing labor as well as material cost. Retrofit Kit 2 (RK2) converts existing relay panels which utilize 2-Wire relays. The kit includes a Controller, four 16-Relay Interface Boards (RIB), and four ribbon cables. Each board is mounted on a single aluminum plate for installation.

Features

Compatible with :

- Douglas Panels (WR-6221, 6161, 6162, 6172, 6321)
- ILC Panels (2PC)

Retains relays, line voltage wire, conduit, and enclosure
Control up to 60 relays

BACnet MS/TP and N2 communication to BAS network

Sub network for Capacitive Touch Stations (CTS-DDN)

Install in less than 4 hours

Available LEXP Digital Input Expansion Card

General Specifications

Construction: PCB's mounted to 14ga aluminum plates

Dimensions:

Controller: 11.00"(279mm)H x 4.50"(113mm)W x 1.56"(40mm)D

RIB: 9.88"(251mm)H x 2.13"(113mm)W x 1.06"(27mm)D

16-20pin Ribbon Cable: 12"(304mm)L

16pin Ribbon Cable: 32"(812mm)L

Weight: 2lbs(1kg)

Mounting: Panel back plate with self-tapping screws (not included)

Operating Environment: 32-125°F (0-50°C), 20-95%RH, non-condensing

Certifications

Electronics meet or exceed IEC Level 3

Warranty

Two (2) year limited manufacturer warranty from date of shipment (extended warranty optional).

Controller Specifications

Power In: 24VAC +/-10%, 30VA, 50-60 Hz

Auxiliary Out: 24VAC Full Wave Rectified

Digital Input: 24 two-wire inputs

Software Configuration: Maintained, state change, momentary on/off, momentary on, or momentary off

Jumper Configuration: 8 input segments, dry contact (N) or 24VDC externally powered (R)

Wire Requirement / Maximum Length: 18AWG (Solid or Stranded) / Dry Contact 500'(152m) or externally powered 1,000'(304m)

Analog Input: 6 three-wire 0-5VDC inputs

Wire Requirement / Maximum Length: 18AWG (Solid or Stranded) / 250'(76m)

BAS Network Specifications

BACnet MS/TP

Baud Rate: DIP switch selectable 9.6K, 19.2K, 38.4K, or 76.8K

Device Profile: BACnet Advance Application Controller (AAC)

Address Range: 1 – 99 selectable with rotary dials

Unit Load: Full unit load, 32 devices per MS/TP segment

N2

Baud Rate: DIP switch selectable 9.6K

Address Range: 1 – 255 selectable with rotary dials and DIP switch

BACnet MS/TP and N2

Topology: RS-485, 3 conductor (+, -, and shield), daisy chain wiring (no stars or t-taps)

Wire Requirement / Maximum Length: Belden 8760 / 4000'(1216m)

Points: See RK Application Guide and PIC Statement

DDN Network Specifications

Compatible with CTS-DDN and DDN devices. See data sheet for details.

RIB Specifications

RIB-A: 2 boards, 16 relay outputs each, drives relays 1-16 and 33-48

RIB-B: 2 boards, 16 relay outputs each, drives relays 17-32 and 49-60

Output Ratings: 24VDC Reversible polarity pulse, ON pulse (-), OFF pulse (+)

Relay Output Compatibility: 1 WR style or equal per, no external power / switches

Output Connection: 2-Wire removable terminal blocks

Wire Requirement / Maximum Length: 18AWG / 50'(15m)

Optional Equipment Specifications

LEXP Specifications

Description: Digital Input Expansion Card

Digital Input: 32 two-wire inputs

Software Configuration: Maintained, state change, momentary on/off, momentary on, or momentary off

Jumper Configuration: 8 input segments, dry contact (N) or 24VDC externally powered (R)

Wire Requirement / Maximum Length: 18AWG (Solid or Stranded) / Dry Contact 500'(152m) or externally powered 1,000'(304m)


Dimensions: 6.00"(152mm)H x 4.50"(113mm)W x 1.13"(29mm)D

Retrofit Kit 2


www.BRTint.com : 800-241-9173 Blue Ridge Technologies® © 2012 Blue Ridge Technologies International, LLC All Rights Reserved. BRT-RK2-DS-V11.00

Data Sheet : Catalog Page 27


General Architecture

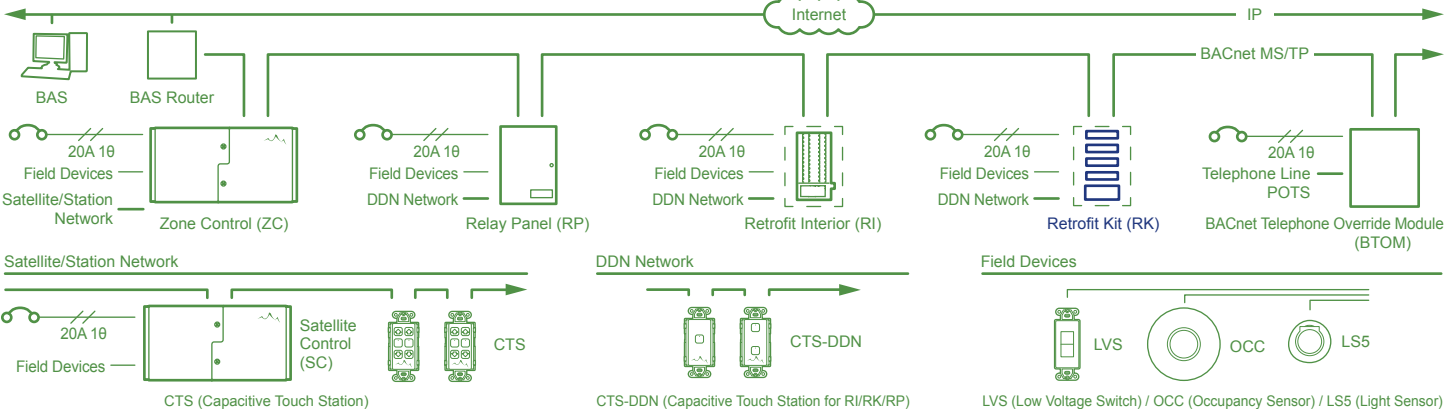


Controller Terminations

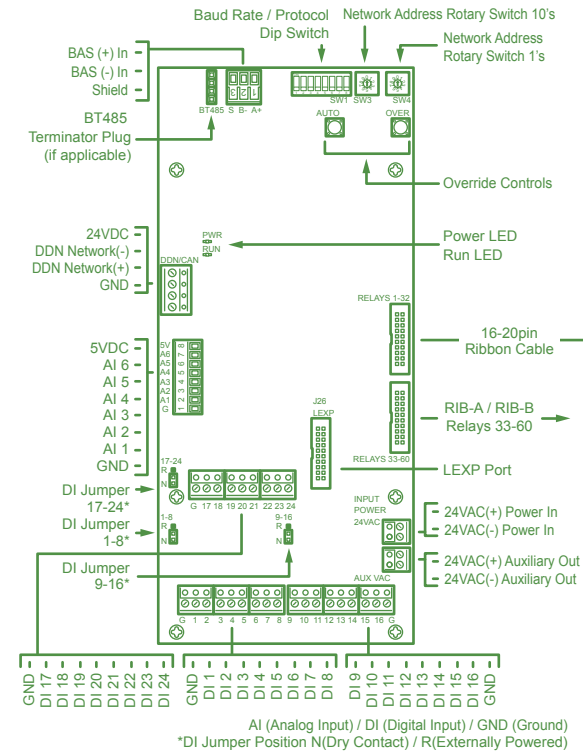


RIB-A Terminations

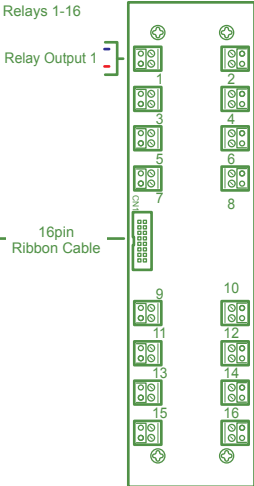

RIB-B Terminations

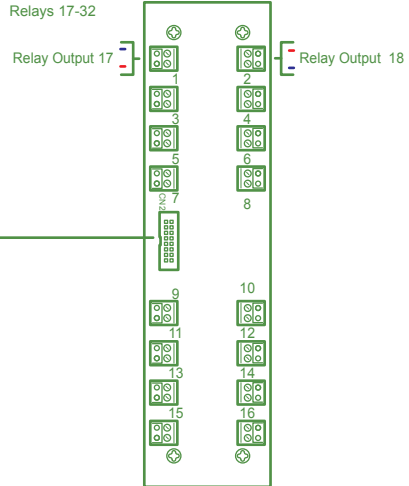

Relay Terminations



Ordering Information

Part Number	Description
BRRK2	Kit for 2-wire relays, Aromat WR or equal, 60 RO, 24 DI, 6 AI
BRRK2-L	Kit for 2-wire relays, Aromat WR or equal, 60 RO, 56 DI total, 6 AI, LEXP (Card, Mounting Plate, and Ribbon Cable)

RO (Relay Output) / DI (Digital Input) / AI (Analog Input)