


Project	Part Number	Ref.
---------	-------------	------

TS02 is a Tri-State Output module for direct control of shade motors or actuators. TS02 is a standard I/O module option for all Panel products. TS02 is combined with other I/O modules via a pluggable CANbus to address specific application requirements.

- Standard Panel Option
- DIN Rail Mounted
- Resides on CANbus Network
- 2 Tri-State Outputs
- Rotary Dial Addressing
- Remote Configuration

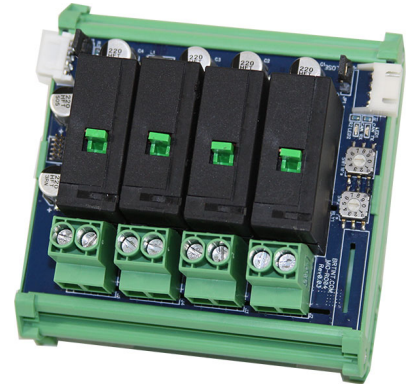

General

Device Type	Class I, Class II	Mounting	DIN Rail
Dimensions	3.50" x 3.50"	Weight	8.7 oz
Wire Requirement	See Cabling Data Sheet		

Capacities

Tri-State Outputs	2		
	120-277VAC, 50/60hz		
	Resistive 20A		
	1.5HP @ 120 VAC		

Power

Input	24VDC, 165mA	Output	N/A
-------	--------------	--------	-----

Communication

CANbus		Topology	Daisy Chain
Baud Rate	125kbps		
Address	Rotary, Range 1 - 16		

Environmental

Ambient Temperature	0 - 130 °F	Plenum Rated	Yes
Relative Humidity (non-condensing)	10 - 90%		

Certification and Listings

UL/CL	UL916	Seismic	2012 ICC-ES AC156, Importance Factor 1.5
-------	-------	---------	--

Ordering Information

TS02	Tri-State Output Module
------	-------------------------